

INSTRUCTIONS FOR DUMPING/CLEANUP ECO-SAFE MODEL SK BOOMBOX

Use rubber gloves when cleaning any toilet system and clean hands when finished.

Take Eco-Safe SK BOOMBOX tank to an approved RV dump station or sanitary disposal site.

Make certain 6" cap is tight.

Remove 1/4" plug and in its place install 1/4" garden hose fitting. Use appropriate end of supplied wrench as these fittings have different hex wrench sizes.

Unscrew 3" waste cap and in its place screw in 3" disposal hose.


Attach garden hose to Eco-Safe SK BOOMBOX tank at the garden hose fitting. Note: ***never connect any water supply to tank before removing 3" waste cap.***

Stretch out disposal hose and put open end into RV dump hole.

Place tank on its end so that 3" waste spout is closest to the ground.

Gradually turn on water supply and flush waste from tank. Note: if tank starts to bulge or leaks develop - there is an

OBSTRUCTION lodged in waste spout or disposal hose. TURN water supply OFF immediately and turn tank upright. Remove obstruction (possible san. napkin or large clump of tissue). Reconnect waste hose, reposition tank and continue flushing until waste is completely removed. Turn water supply off and place tank upright.

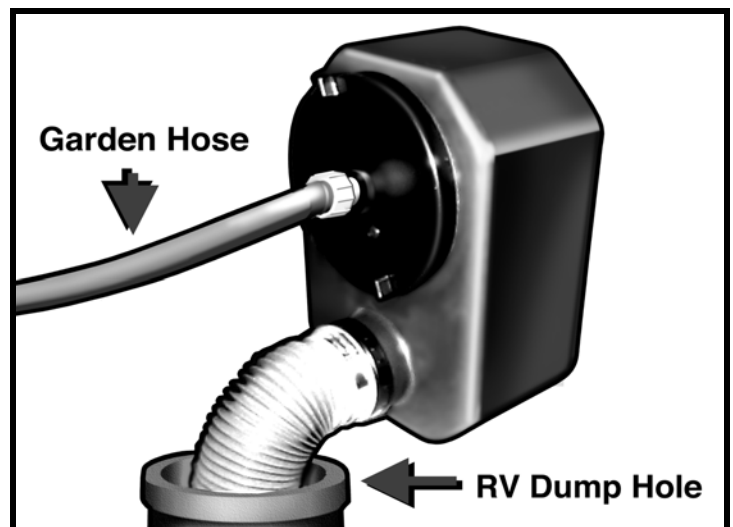

Disconnect garden hose. Remove 6" cap and check to see if tank is thoroughly clean. Repeat cleaning procedure if necessary.

Put 4 oz. of bio-degradable chemical deodorant suitable for portable toilets into tank, tighten 6" cap and swirl around. Dump contents through disposal hose into RV dump. Remove disposal hose. Replace 3" waste cap.

Unscrew 1/4" garden hose fitting and in its place screw in 1/4" plug.

Note: You can store unit with 4 oz. of bio-degradable chemical deodorant in tank as preparation for next trip.

CLEAN HANDS AFTER EACH USE